




# UGY800CKS

## UNIVPOWER SILENT SERIES

### POWER OUTPUT

Prime Rating — 640 kW (800 kVA)  
 Standby Rating — 710 kW (887.5kVA)  
 3-Phase, 50 Hertz, 0.8 PF

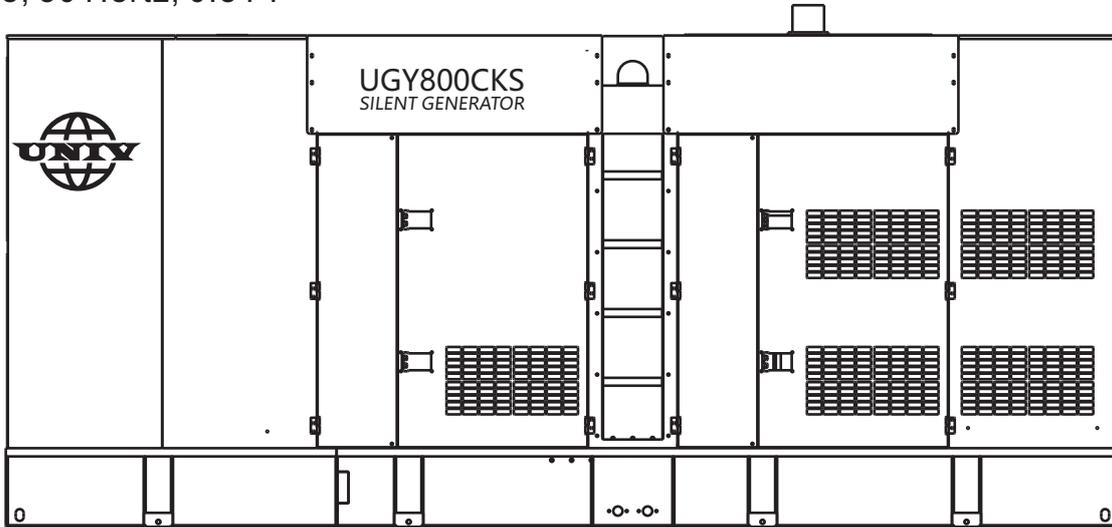

### STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
  - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
  - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to  $\pm 0.25\%$ .
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 88dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel  
 E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
  - High visibility LCD display with heated screen and alphanumeric readout.
  - IP65 Protection standard, operational temperature range of -40° to 85° C.
  - Modbus interface for gauge panel and expansion options.
  - DPF cleaningcycle indication.
  - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

### UNIVPOWER SILENT SERIES


#### UNIV POWER DECIBELLEVELS

Revolving field, self ventilated weatherproof Normal conversation allows substantially lower operating noise levels than competitive designs. UNIVGensets good for home, construction sites, residential, hospital, etc.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 60 — Air conditioner at 6m
- 50 — Normal conversation

**88.0**  
DECIBELS

### GENERATOR OUTPUT PANEL

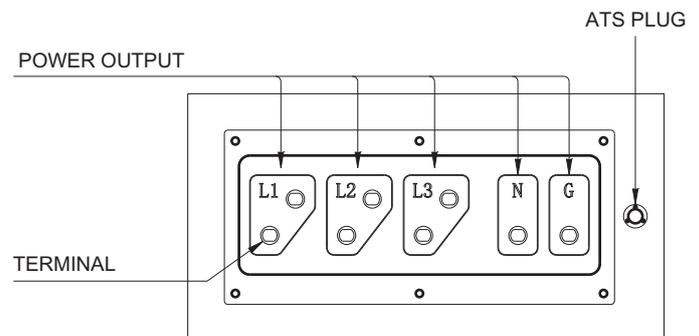



# UGY800CKS

## UNIVPOWER SILENT SERIES

### SPECIFICATIONS

Generator Specifications	
Model	Revolving field, self-ventilated weatherproof
Armature Connection	Star with Neutral
Phase	3
Standby Output	710KW (887.5KVA)
Prime Output	640KW (800KVA)
Power Factor	0.8
Voltage Regulation (No load to full load)	±0.5%
Generator RPM	1500
Frequency	50 Hz
No. of Poles	4
Excitation	Brushless with AVR
Frequency Regulation: No Load to Full Load	Isochronous under varying loads from no load to 100% rated load
Frequency Regulation: Steady State	±0.25% of mean value for constant loads from no load to full load.
Insulation	Class H
Sound Level dB(A) Full load at 7M	88

Amperage	
Rated Voltage	Maximum Amps
3Ø Volt 220/380	1216 Amps
3Ø Volt 230/400	1155 Amps
Main Line Circuit Breaker Rating	1250 Amps
Over Current Relay Trip Set Point 400V Mode Only	1375 Amps

Fuel System	
Maximum Fuel Flow (per hour)	79.3 gallons (400 liters)
Fuel Tank Capacity	269.5 gallons (1020 liters)
Fuel Consumption	L / h
At full load	182
At 3/4 load	136
At 1/2 load	95
At 1/4 load	46

Control system	
Controller Brand	Deepsea
Model	DSE4520
Module	Manual/Auto start/stop module
Standard function	Engine control
	Generator monitoring
	Generator protection
	Specification
Display	Frequency
	Battery voltage
	Running hour
Warning/shutdown	under/over voltage
	under/over speed
	under/over frequency
	Low oil pressure
	High water temperature
Communication port	USB

Engine Specifications	
Make / Model	Cummins / KTA38-G2B
Emissions	/
Starting System	Electric
Design	4-cycle, water cooled, direct injection, Turbo charged
Displacement	37.8 liters
No. cylinders	12
Bore x Stroke	159 x 159 mm
Gross Engine Power Output	1058.9 hp (790 kW)
Compression Ratio	14.5 : 1
Engine Speed	1500 rpm
Overspeed Limit	1725 rpm
Oil Capacity	35.7 gallons (135 liters)
Coolant Capacity	28 gallons (106 liters)
Battery	24V 120Ah x 4

Alternator	
Alternator Brand	Stamford/Mecc alte/Kwise
Alternator Model	S6L1D-C4/ECO43 1S4A/S404G640D2
Excitation	Brushless, Self-Excited system
Capacity(KVA)	800kva
Power(KW)	640kw
Efficiency(%)	92%
Insulation class	Class H
Protection class	Ip23
Steady state voltage regulation	±1%
Voltage control	AVR

### WARRANTY\*

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



### NOTICE

Enough Air flow is extremely important to Generator operation. Improper connection can cause electrocution and/or property damage. Do not connect to any electrical system except through an approved device. Specifications are subject to change without notice.




# UGY800CKS

## UNIVPOWER SILENT SERIES

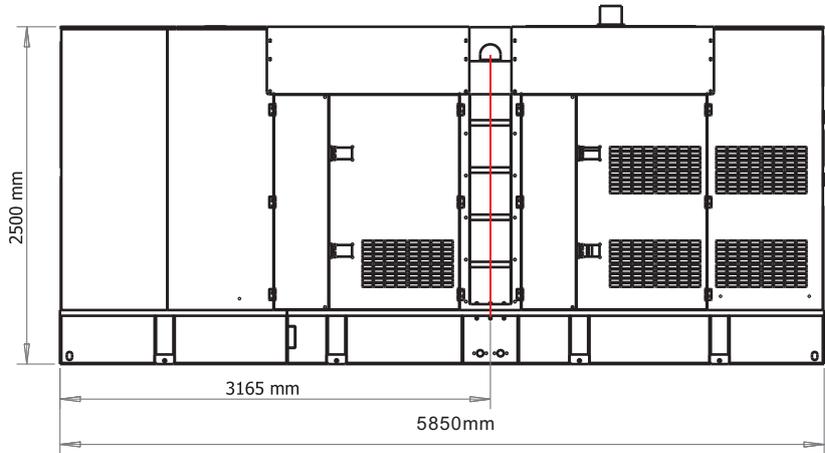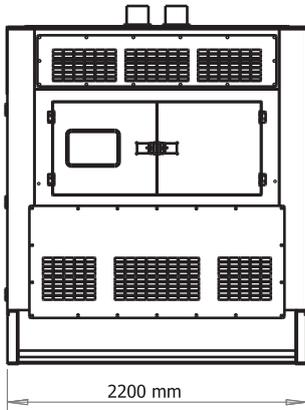

Weight	
Dry Weight	5,000 lbs. (11,000 kg)
Wet Weight	5,922 lbs. (12,000 kg)
Max. Lifting Point capacity	11,818 lbs. (26,000 kg)

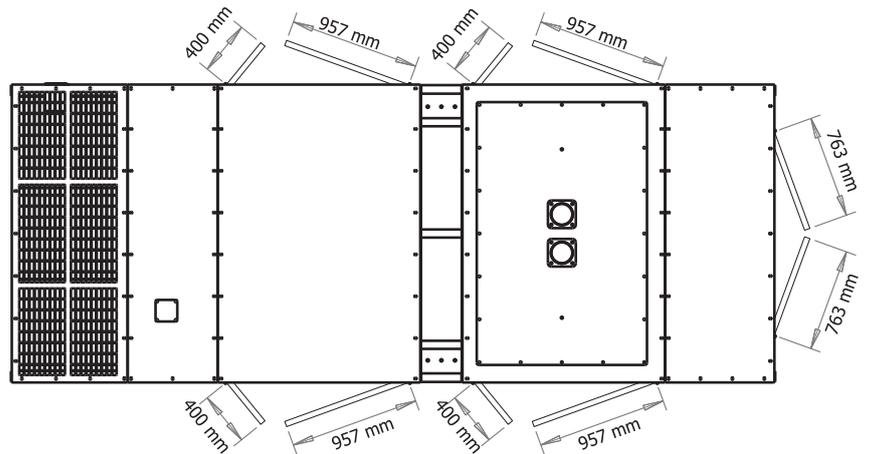

Manufactured by  
**Zhejiang Universal Machinery Co., Ltd**  
 Add: No 18-9 Nanshan Road, Qujiang Zone,  
 Quzhou city, Zhejiang Province, CN  
 Tel: 0086-570-3377022/3377023  
 Fax: 0086-570-3377086  
 Website: [www.univpower.com](http://www.univpower.com)